


Slim series




Stage show
Rental Business
Concerts & Events




Lightweight

Using the ABS material, simple design; 1700sqm LED Screen only weights about 16.2tons, effectively reducing the transportation cost

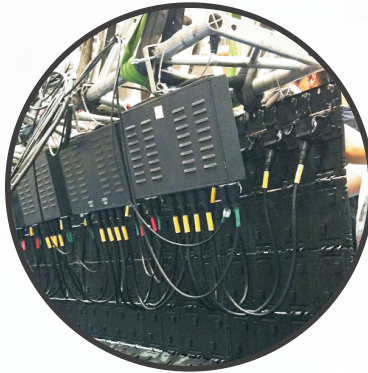


Cool&quiet

The separate design of power supply and screen body ensures that the screen is cool & quiet

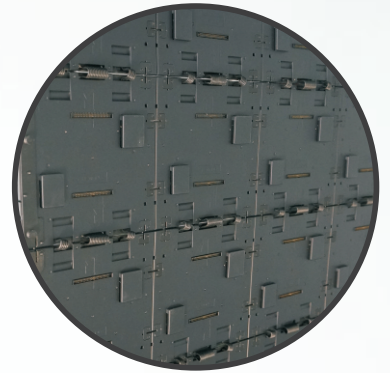


Elegant minimalism design, user-friendly

Discrete modules combined, no complex structures, no complex cabling, easy installation

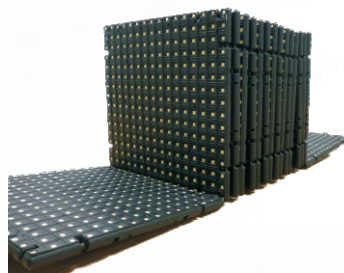

360 degree foldable

Without the aid of any tools, you can perform 360 degree folding.

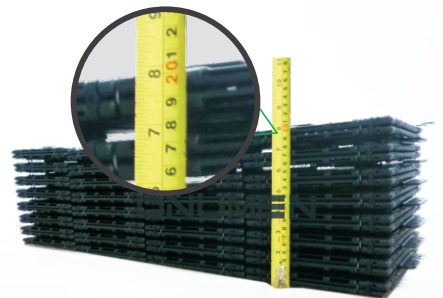

Ultra-Slim

Easy for installation and transportation. Transportation and warehousing cost saving

Ultra long control


One receiving card can support max 1024 pixels




Circle



S

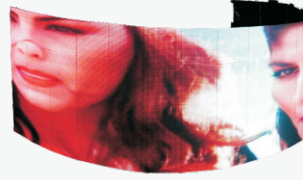


Arc

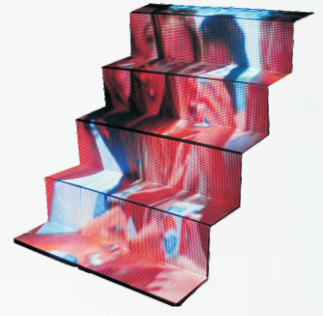

Ladder

Quick maintenance/1 minute quick maintenance

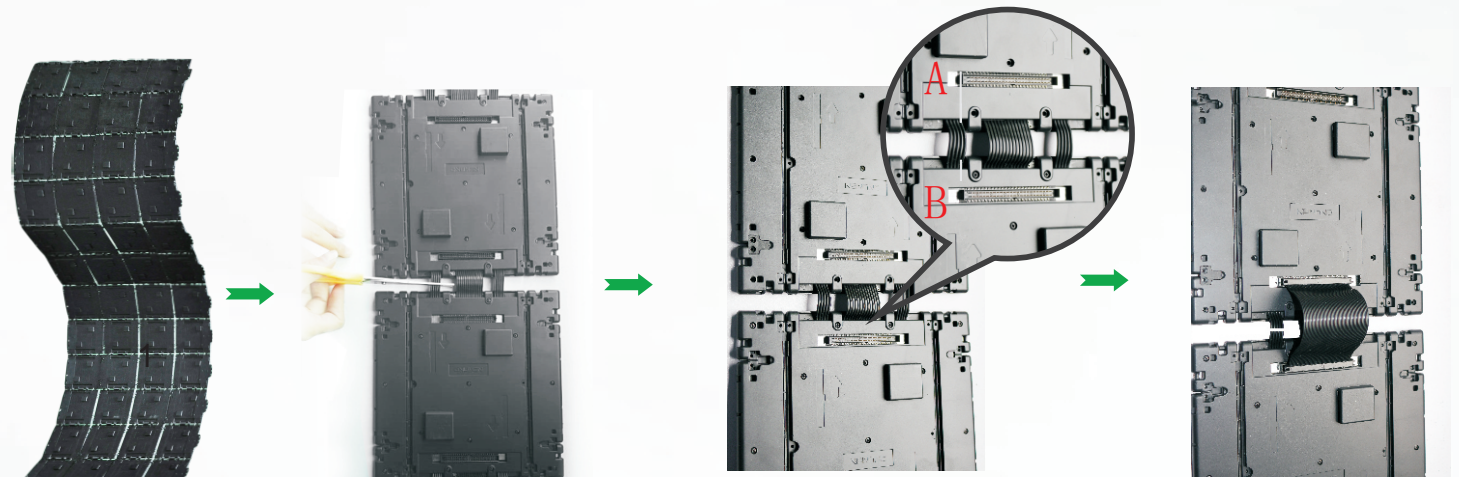

1. Cut the ribbon cable,
replace the module

2. Insert the ribbon cables into port A and port B,
connect to the replaced module

Model	Slim6		Slim7.8		Slim10	Slim12	Slim20
Pitch (mm)	P6		P7.8		P10	P12	P20
Waterproof	Indoor IP43/IP54	Indoor IP43/IP54	Indoor IP43/IP54	Outdoor IP54/IP65	Indoor IP43	Indoor IP43/IP54	Indoor IP43
LED type	SMD3528	SMD3528	SMD3528	SMD3535	SMD3528	SMD3528	SMD3528
Scan mode	16	8	16	8	8	8	4
Max brightness(nits)	2000	4000	1000	6500	1500	1000	500
Operating voltage	DC24V	DC24V	DC24V	DC24V	DC5V	DC24V	DC5V
Average power(w/m ²)	150	310	90	200	110	75	55
Max refresh rate(kHz)	4000	8000	4000	8000	8000	8000	16000
Unit size(mm×mm)	192×192		250×250		160×160	192×192	160×160
Single-sided thickness	15		18.5		11	15	9
Double-sided thickness	23		29		22	23	18
Weight(kg/m ²)	<10		<9		<9	<9	<8
Foldable angle	360 ⁰		360 ⁰		360 ⁰	360 ⁰	360 ⁰
Magnet	NO		YES		NO	NO	NO
Quick Maintenance	NO		NO		NO	NO	NO
Max Length of control box	6m		8m		4m	12m	8m
Connection type	2+14pin(Main) / 50pin(Option)						

